




Issue 11/001MF&D

RUBBER & PLASTIC MATTING & FLOORINGS - LIST 2011 Issue 1

Food & Drinks - Catering

Giving you the competitive edge

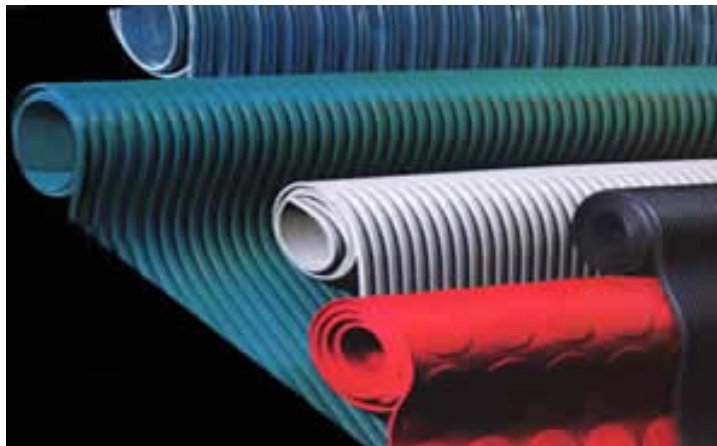

Product Range covered in this issue:-

- *Linkable, Ring Type 'Restaurant' Mats*
 - *TruGrip Non Slip Drainage Mats*
 - *Food & Drink Preparation area Workstation Mats*
 - *PVC Lattice Drainage Matting*
 - *Open Grid Heavy Duty Rubber Matting*
 - *ExDek & VeeGrip Open Grid PVC Tiles & Rolls*
 - *Studded Matting for Canteen Floors & Walkway*
-

Table of Contents

Food & Drink Area Mattings

- **Page 3 - CORU630**
Linkable 'Restaurant' Mat
- **Page 4 - CORU631**
'TruGrip' Non Slip Rubber Mat
- **Page 5 - CORU635**
Rubber Work Station Safety Mats
- **Page 6 - CORU635DS**
Rubber Work Station Safety Mats
- **Page 7 - CORU668**
Lattice Type PVC Rubber Matting
- **Page 8 - CORU531**
Heavy Duty Open Grid PVC
- **Page 9 - CORU522 & CORU523**
ExDek & VeeGrip Open Grid PVC
- **Page 10 - CORU599TM & TMHD**
PVC Linkable Floor Tiles
TM - Round Studded Type
TMHD—Bark Finish Type
- **Page 11 - CORU599 & CORU666**
Studded type Rubber & PVC
Runner Matting for floors
- **Page 12 - CORU560, 561, 562 & 563**
Patterned Hygienic PVC
Runner Mattings in rolls
- **Page 13 - CORU695**
Footbath / Well Mats
- **Page 14 - Back Page**
Address & contact details

Coruba's published price lists are applicable for full length rolls or mats only and are subject to the following conditions:-

Discount structure:-

Minimum Order Value: £50.00 - £499.00 net

Order Value: £500.00/749.00 - Less 5%

Order Value: £750.00/999.00 - Less 7.5%

Order Value: £1000.00/1500 - Less 10%

For order value exceeding £1500.00 or repeating, scheduled orders please refer to our sales office.

Cut Lengths: Where applicable cut lengths can be offered subject to a 20% surcharge or to a minimum value of £10.00

Carriage Terms:-

Carriage is paid on all consignments exceeding £350.00 net value. For consignments below this amount a charge of between £12.50/£30.00 would be levied dependent on consignment size, weight and volume.

The above terms are based on our standard two to three day carrier service and is applicable for England, Wales and Scottish borders. Details on application for other areas.

Surcharges will apply for consignments requested to be sent on next day or special couriers.

We regret that items sent from our other branches may not be included in the above terms.

The materials and styles stated herein represent our standard stock range of matting's.

We have extensive knowledge in this field and would welcome an opportunity to quote you for any special or custom made product you require.

Many of the items listed could be produced in other formats for thickness, size, colour and compound so please do not hesitate to ask for details.

Other matting and flooring brochures available:-

- Rubber Mattings
- Anti-Fatigue
- Entrance and Doorway
- Equine, Animal & Agricultural
- Sports, Leisure & Gym

Please ask for copies

Style 630 Moulded All Rubber 'Restaurant' Mats



FEATURES:

- 0.91m x 0.91m x 13mm Black & Red
- 0.91m x 0.91m x 16mm Black & Red
- Connectable ramp edges to suit
 - Black - General Purpose
 - Red & Blue - Grease resistant
- Excellent Drainage Characteristics
- Good anti-fatigue properties
- Anti-Slip cover in wet or greasy areas
- Optional bevelled safety edges available
- Easy assembly with integral connectors

Style Information and Data

Probably the most commonly requested and best known floor protection, anti-fatigue safety mat which is linkable to form larger areas or to run along galleys / pathways.

We offer this style in two colour types [see above] in 13.0mm light and 16mm heavy duty, which are manufactured to the following general specifications:-

Polymer Type:	NR/SBR/NBR
Hardness:	60°
Density - SG:	1.3
Tensile Strength:	5.0 Mpa
Elongation at break:	250%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Note

The above tile mat ramp edges are only suitable for use with the heavier 16mm thick mats and some extra fitting methods may have to be employed to fit 13mm types.

The above grade can be manufactured in various colours and in a **Flame-Retardant, Low smoke low emission** compound to special order but minimum run quantities will apply. Please ask for details.

Style 631 'TruGrip' Non-Slip Mats



FEATURES:

- 1.20m x 0.91m x 9.5mm Terra Cotta
- 2.40m x 0.91m x 9.5mm Terra Cotta
- Terra Cotta Grease resistant stock
- Black [General Purpose] available to special order
- Good Drainage Characteristics
- Good anti-fatigue properties
- Excellent Non-Slip in wet or greasy areas
- Unique Aggressive non slip surface
- High Traction pattern reverse keeps firmly

Style Information and Data

A high quality extremely efficient non slip anti-fatigue mat with unique profiled pattern surface giving excellent safety features in wet, greasy kitchen, canteen and food preparation areas.

We offer this style from stock in terra cotta coloured only [black general purpose to special order] which is manufactured to the following general specifications:-

Polymer Type:	NR/SBR/NBR
Hardness:	60°
Density - SG:	1.3
Tensile Strength:	5.0 Mpa
Elongation at break:	250%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Style 635 Moulded Rubber Workstation Mats - Drainage Type



FEATURES:

- 0.91m x 0.91m x 14mm Black & Red
- 1.52m x 0.91m x 14mm Black & Red
- Black - General Purpose
- Red - Grease resistant
- High Quality Rubber Workstation mats
- Excellent anti-fatigue properties
- Good slip resistant surface pattern
- Good water, liquid and debris drainage
- Integrally moulded bevelled safety edge
- Economically priced


Style Information and Data

A very popular and attractive high quality moulded rubber free standing anti-fatigue mat with bevelled ramp safety edges all round. The most popular free standing anti-fatigue mat on the market.

CORU635 is available from stock in various formats as listed and is made to the following general specifications:-

Polymer Type:	NR/Blend
Hardness:	60°
Density - SG:	1.4
Tensile Strength:	3.0 Mpa
Elongation at break:	250%
Abrasion Resistance:	250 mm ³
Temperature Resistance:	-20/+70°C

Style 635DS Moulded Rubber Workstation Mats - High Drainage Type

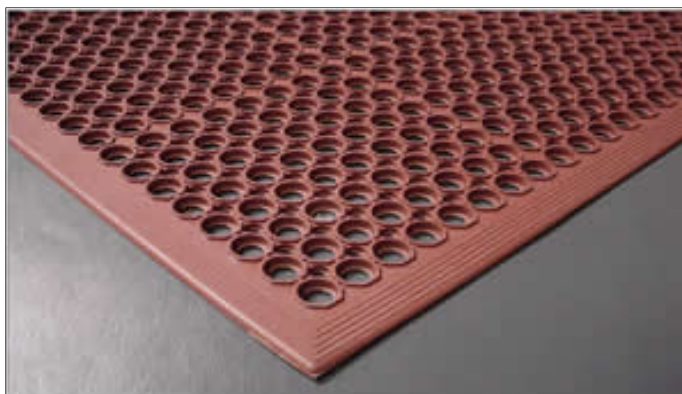

FEATURES:

- 1.52m x 0.91m x 12.5mm Black
- 1.52m x 0.91m x 12.5mm Red
- Black - General Purpose
- Red - Grease resistant
- High Quality Rubber Workstation mats
- Excellent anti-fatigue properties
- Good slip resistant surface pattern
- Good water, liquid and debris drainage
- Integrally moulded bevelled safety edge
- Economically priced


Style Information and Data

A very popular and attractive high quality moulded rubber free standing anti-fatigue mat with bevelled ramp safety edges all round. The most popular free standing anti-fatigue mat on the market.

CORU635 is available from stock in various formats as listed and is made to the following general specifications:

Polymer Type:	NR/Blend
Hardness:	60°
Density - SG:	1.4
Tensile Strength:	3.0 Mpa
Elongation at break:	250%
Abrasion Resistance:	250 mm ³
Temperature Resistance:	-20/+70°C

Style CORU668 'Lattice' PVC Drainage Matting

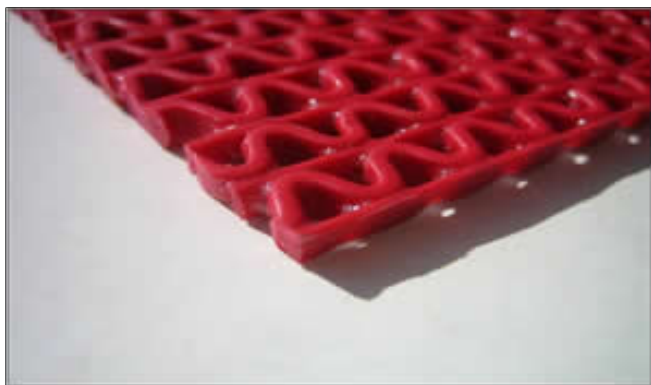

FEATURES:

- 1.2m x 15m x 4.0mm Blue, Green, Red, Grey
Many other colours to special order
- Premium grade PVC Matting
- Unique 'open grid' pattern
- Excellent drainage properties
- Excellent chemical, oil & Grease resistance
- Fully reversible - can be used either face
- Tough and durable construction
- Attractive range of colours

Style Information and Data

An attractive, hardwearing and durable PVC runner matting. Ideal in areas of excessive water / liquid spillage. Oil and Grease resistant. Lattice pattern enables quick drainage of fluids and dust particles.

CORU668 is available from stock in a variety of differing colour formats and is made to the following general specifications:-

Polymer Type:	PVC
Hardness:	75°
Density - SG:	1.7
Tensile Strength:	8.0 Mpa
Elongation at break:	200%
Abrasion Resistance:	150 mm ³
Temperature Resistance:	-20/+100°C

Style CORU531 PVC Grid Matting - Wet Food & Drink Preparation Areas



FEATURES:


- 0.61m x 12.2m x 12.7mm Blue or Grey
- 0.91m x 12.2m x 12.7mm Blue or Grey
- 1.22m x 12.2m x 12.7mm Blue or Grey
- Heavy duty durable PVC compound
- Slip resistant pattern finish for wet environments
- Excellent drainage characteristics
- High impact and resilience
- Resistant for indoor or outdoor applications
- Excellent resistance to oils, grease & chemicals

Style Information and Data

A high quality pvc grid matting offered excellent non slip characteristics in areas of excess water. Ideal for shower rooms, walkways, or swimming pool surrounds.

CORU531 is available from stock in the colours and roll formats stated or cut pieces as required. Other colours and sizes available to special order but subject to minimum batch production runs.

Style CORU522 & CORU523 PVC Open Grid Matting - Wet Food & Drink Preparation Areas

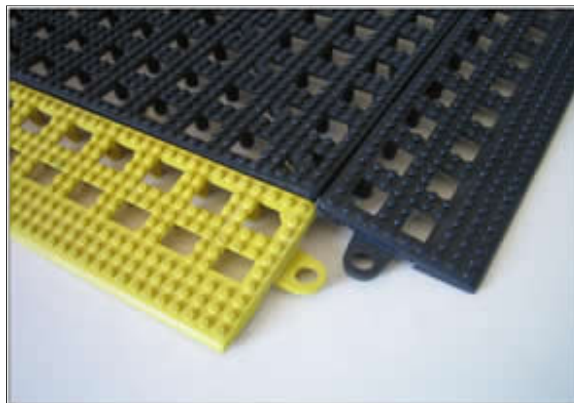

FEATURES:

- High quality flexible PVC Construction
- Open grid allows for easy drainage
- Clean & Hygienic - Oil, grease, chemical, heat bacteria and mould resistant
- Reversible for extended mat life
- Easily cut to size
- Bevelled edge strips available.

Style Information and Data

A high quality pvc grid matting offered excellent non slip characteristics in areas of excess water. Ideal for shower rooms, walkways, or swimming pool surrounds.

CORU522- ExDek & CORU523 VeeGrip are available from stock in the colours and roll/tile formats stated left or cut pieces as required. Other colours and sizes available to special order but subject to minimum batch production runs.

Note:

CORU522 ExDek rolls sizes stated are produced from tile format linked / connected into rolls

Style CORU599 TM & TMHD Hygienic PVC Tiles - Wet Food & Drink Preparation Areas



FEATURES:


- High quality and durable PVC Construction
- Good slip resistance
- Clean & Hygienic - Oil, grease, chemical, heat bacteria and mould resistant
- Excellent linkable edge connection
- Easily cut to size
- Bevelled edge strips available with TMHD type

Style Information and Data

A high quality pvc linkable floor tile offering excellent non slip characteristics in areas of excess fluids. Snap in link edges produce a firmly fixed connection often eliminating the need for secondary [adhesive] fixing. Ideal for kitchens, canteens, garages, shower rooms, walkways, swimming pool surrounds and industrial / municipal areas.

CORU599TM & TMHD are available from stock in the colours and tile formats stated left. Other colours are available to special order but subject to minimum batch production runs..

Style CORU599 & CORU666 Stud Pattern Rubber & PVC Matting

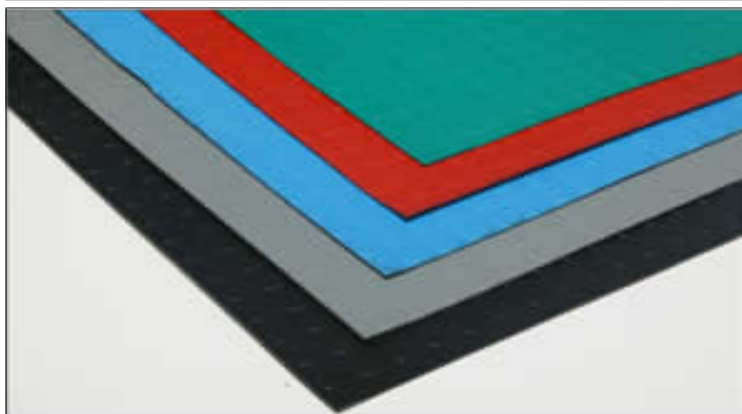

STOCK ROLL SIZES:

CORU599 Rubber Type - Round Stud

- 1.2m x 10m x 3.0mm rolls in Black, Grey, Blue & Green
- 1.2m x 10m x 4.0mm rolls in Black & Grey
And Economy Grades - see below

CORU666 PVC Type - Square Stud Type

- 1.1m x 10m x 2.4mm rolls in Black, Grey, Blue, Green & Red

FEATURES:

- Neat, smart & Attractive pattern
- Hard - wearing & durable
- High Slip resistant multi-directional patterned surfaces
- Impression finish anti-creep reverse
- Good floor to foot cold insulation properties
- Easy Clean Surfaces

Style Information and Data

A very popular and attractive runner matting with round circular stud pattern design with anti-creep back pattern.

CORU599 & CORU666 is available from stock in three grades, economy [matt finish], premium [sheen finish] and PVC type and are made to the following general specifications:-

SM599Rubber

Polymer Type:	NR/SBR
Hardness:	70°
Density - SG:	1.4
Tensile Strength:	4.0 Mpa
Elongation at break:	150%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

CORU666 PVC

Polymer Type:	PVC
Hardness:	75°
Density - SG:	1.8
Tensile Strength:	3.0 Mpa
Elongation at break:	200%
Abrasion Resistance:	250 mm ³
Temperature Resistance:	-20/+100°C

These grades can be produced in varying width, length and thickness formats and in a variety of colours [RAL matched if needed] to special order. These would be subject to minimum batch run quantities, usually 200 M2 per size/colour.

Style CORU560, 561, 562 & 563 Hygienic PVC Runner Matting



STOCK ROLL SIZES:

Hygienic PVC Runner Matting

Types:-

CORU560 Ribbed Type

CORU561 Circular Stud Type

CORU562 Pebbled Pattern Type

CORU563 Pyramid Pattern Type

Stock Colours:-

CORU560 Black, Blue, Green, Grey & Red

CORU563 Black and Blue

All rolls sizes: 10m x 1.2m x 2.5mm thick

FEATURES:

- Neat, smart & Attractive patterns
- Hard - wearing & durable
- Slip resistant patterned surfaces
- Clean & Hygienic
- Good floor to foot cold insulation properties
- Easy Clean Surfaces

Style Information and Data

A very popular and attractive runner matting with round circular stud pattern design with anti-creep back pattern.

CORU599 & CORU666 is available from stock in three grades, economy [matt finish], premium [sheen finish] and PVC type and are made to the following general specifications:-

PVC

Polymer Type:	PVC
Hardness:	75°
Density - SG:	1.8
Tensile Strength:	3.0 Mpa
Elongation at break:	200%
Abrasion Resistance:	250 mm ³
Temperature Resistance:	-20/+100°C

These grades can be produced in varying width, length and thickness formats and in a variety of colours [RAL matched if needed] to special order. These would be subject to minimum batch run quantities, usually 200 M2 per size/colour.

Style 695 Moulded Footbath / Well Mats



STOCK MAT SIZES:

- 700 x 900mm x 25mm Black
- 700 x 1200mm x 25mm Black
- 700 x 900mm x 25mm Black/Yellow
- 700 x 1200mm x 25mm Black Yellow

FEATURES:

- High Quality all rubber mould construction
- Option Black or Black Yellow safety edge
- Bevelled safety edge all round
- Deep 18mm well for disinfectant retention
- Dimpled well base for foot scraping
- Heavy Duty 25mm thickness

Note

Yellow edges mats are currently under tests and development.

Style Information and Data

A heavy duty well mat with excellent liquid retention and durable construction. Ideal for walkway entrances reducing risk of spreading germs and viruses. Also suitable for placement of leaking refuse sacks and objects prior disposal.

CORU695 is stocked in two size and type formats as listed and is made to the following general specifications:-

Polymer Type:	NR/SBR
Hardness:	65
Density - SG:	1.4
Tensile Strength:	6.0 MPa
Elongation at break:	300%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C



Head office & Factory:

Units 28 & 30 Purdeys Way
Purdeys Industrial Estate
Rochford
ESSEX UK
SS4 1ND

Telephone: 0845 130 1375
Fax: 0845 130 8375
Email: sales@Coruba.co.uk
Web: www.Coruba.co.uk

Fabrication & Conversion Division:-

Unit 8
Saxon Business Park
Littleport
CAMBRIDGESHIRE UK
CB6 1XX

Telephone: 0044 [0] 1353 864880
Fax: 0044 [0] 1353 864881
Email: cambridge@Coruba.co.uk
Web: www.Coruba.co.uk

Coruba is a division of Accrasystem Limited

UK Registration No: 2127351

UK VAT Number: 506 1111 07