




Issue 11/001MLEQAG

RUBBER & PLASTIC MATTING & FLOORINGS - LIST 2011 Issue 1

Equine, Animal & Agricultural Mattings

Giving you the competitive edge

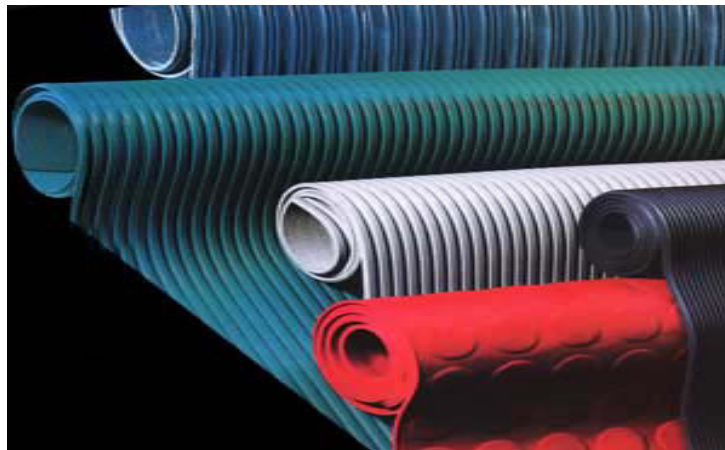

Product Range covered in this issue:-

- *Moulded Rubber Horse & Animal Stable & Enclosure Mats*
 - *Horse Box and Animal Transporter Vehicle Mats*
 - *Horse and Animal Transporter Ramp Mats*
 - *Horse and Animal Transporter & enclosure wall protection Mats*
 - *Heavy Duty Cow and Animal enclosure Mats*
 - *Crumb Rubber Pavers for Horse Walker and Activity Areas*
 - *Crumb Rubber Tiles for Horse Walker and Activity Areas*
 - *Open Type Ring Mats for Animal Wash Down Areas and Ground Stabilization and Play Areas.*
-

Table of Contents

<p><u>Equine & Animal Mattings</u></p> <ul style="list-style-type: none"> • Page 3 - CORU600 & S602 Studded Rubber Stable Mats Hammered Rubber Stable Mats • Page 4 - CORU604, CORU607 & CORU610 Amoebic Rubber Stable Mats VersaTile Connectable Mats • Page 5 - CORU611 & CORU715 Hammatile Connectable Mats Stabelite EVA Stable Mats • Page 6 - CORU577& CORU665 Diamond Titanmat Hammered Magnamat in Rolls • Page 7 - CORU540 & CORU548 Broad Ribbed Matting in rolls Griptop Ramp Matting in rolls • Page 8 - CORU675 , CORU711 & 714 Dual Ridge Moulded Ramp Mats EVA Foam Wall Protection Mats • Page 9 - CORU620 & CORU810 Heavy Duty Cow & Animal Mat Rubber Crumb Pavers / Walkers • Page 10 - CORU840 & CORU625 Rubber Crumb Tiles / Walkers Animal Washdown / stabilisation • Page 11 - CORU695 Footbath / Well Mats • Page 12 - Back Page Contact details 	<p>Coruba's published price lists are applicable for full length rolls or mats only and are subject to the following conditions:-</p> <p><u>Discount structure:-</u></p> <p>Minimum Order Value: £50.00 - £499.00 net Order Value: £500.00/749.00 - Less 5% Order Value: £750.00/999.00 - Less 7.5% Order Value: £1000.00/1500 - Less 10%</p> <p>For order value exceeding £1500.00 or repeating, scheduled orders please refer to our sales office.</p> <p>A SMALL PERCENTAGE OF ROLLS SUPPLIED MAY BE IN TWO PIECES</p> <p>Cut Lengths: Where applicable cut lengths can be offered subject to a 20% surcharge or to a minimum value of £10.00</p> <p>Carriage Terms:- UNLESS STATED AGAINST PAGE ITEMS:- Carriage is paid on all consignments exceeding £350.00 net value. For consignments below this amount a charge of between £12.50/£30.00 would be levied dependent on consignment size, weight and volume. The above terms are based on our standard two to three day carrier service and is applicable for England, Wales and Scottish borders. Details on application for other areas. Surcharges will apply for consignments requested to be sent on next day or special couriers.</p> <p>We regret that items sent from our other branches may not be included in the above terms.</p> <p>The materials and styles stated herein represent our standard stock range of matting's.</p> <p>We have extensive knowledge in this field and would welcome an opportunity to quote you for any special or custom made product you require.</p> <p>Many of the items listed could be produced in other formats for thickness, size, colour and compound so please do not hesitate to ask for details.</p> <p>Other matting and flooring brochures available:-</p> <ul style="list-style-type: none"> • Runner Mattings • Electrical Safety Matting • Anti-Fatigue Mattings • Entrance & Door Mats • Sports, Leisure & Gym • Catering - Food & Drinks <p>Please ask for copies</p>
---	---

Style 600 'Studded' Moulded Rubber Stable Mats



FEATURES:

- Robust heavy duty regenerated rubber
- High profile bubble pattern one side
- Broad Ribbed fluted pattern other side
- Reversible for extended life
- Easy to clean
- Economically priced
- 1.8m x 1.2m x 12mm Black
- 1.8m x 1.2m x 17mm Black

Style Information and Data

A popular and economically priced moulded mat ideal for horse stable and other animal enclosure floors.

CORU600 is available from stock in one size only as listed and is made to the following general specifications:-

Polymer Type:	NR/SBR
Hardness:	65°
Density - SG:	1.6
Tensile Strength:	2.5 Mpa
Elongation at break:	200%
Abrasion Resistance:	250 mm ³
Temperature Resistance:	-20/+70°C

This grade can be produced in varying width, length and thickness formats and in a variety of colours to special order. These would be subject to minimum batch run quantities.

Style 602 'Hammered' Moulded Rubber Stable Mats



FEATURES:

- 1.8m x 1.2m x 12mm Black
- 1.8m x 1.2m x 17mm Black
- Robust heavy duty natural rubber
- Low profile 'Hammered' pattern one side
- Broad Ribbed fluted pattern other side
- Reversible for extended life
- Easy to clean
- Economically priced

Style Information and Data

A Superior but economically priced all rubber moulded mat ideal for horse stable and other animal enclosure floors.

CORU600 is available from stock in two thicknesses listed and is made to the following general specifications:-

Polymer Type:	NR/SBR
Hardness:	65°
Density - SG:	1.5
Tensile Strength:	3.0 Mpa
Elongation at break:	250%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Style 604 'Amoebic' Bark Moulded Rubber Stable Mats



FEATURES:

- 1.8m x 1.2m x 10mm Black
- 1.8m x 1.2m x 12mm Black
- 1.8m x 1.2m x 17mm Black
- 2.0m x 1.0m x 10mm Black
- 2.0m x 1.0m x 12mm Black
- 2.0m x 1.0m x 17mm Black
- High quality, heavy duty durable natural rubber
- Low profile Amoebic pattern one side
- Broad Ribbed fluted pattern other side
- Reversible for extended life

Style Information and Data


Our bestseller. A superior, top quality, all rubber moulded mat ideal for horse stable and other animal enclosure floors. Also suitable for animal transport vehicle floors.

It can also be used for various other industrial or sports related floor coverings.

CORU604 is available from stock in three thickness and two size formats listed and is made to the following general specifications:-

Polymer Type:	NR/SBR
Hardness:	65°
Density - SG:	1.5
Tensile Strength:	3.0 Mpa
Elongation at break:	250%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Style 607 & 610 'VersaTile' Connectable Rubber Mats

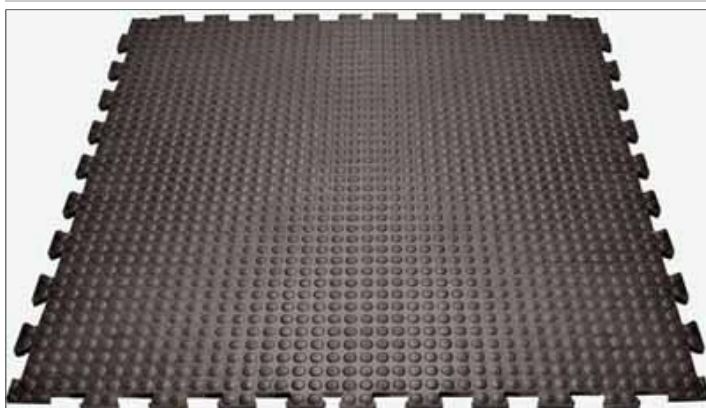

FEATURES:

- 1.0m x 1.0m x 16mm thick
607 Studded on both sides
- 1.0m x 1.0m x 17mm thick
610-1 Studded on one side
- High quality & durable Rubber Floor Mat
- Easy to lay and fit to size
- Interlocking connectable edges
- Attractive round studded surface on both sides
- Reversible for longer life expectancy
- Easy to clean surface

Style Information and Data

A superior, high grade all rubber moulded mat ideal for horse stable, animal enclosure floors, and a multitude of other applications.

CORU607 & CORU610 are available from stock in two style and pattern types listed and is made to the following general specifications:-

Polymer Type:	NR
Hardness:	65°
Density - SG:	1.3
Tensile Strength:	6.0 MPa
Elongation at break:	350%
Abrasion Resistance:	150 mm ³
Temperature Resistance:	-20/+70°C

Style 611 'HammaTile' Connectable Rubber Mat



FEATURES:

- 1.0m x 1.0m x 12mm thick
- 1.0m x 1.0m x 17mm thick
- Black only
- High quality & durable Rubber Floor Mat
- Easy to lay and fit to size
- Interlocking connectable edges
- Attractive 'Hammered' surface one side/fluted reverse
- Reversible for longer life expectancy


Style Information and Data

A superior, high grade all rubber moulded mat ideal for horse stable, animal enclosure floors, and a multitude of other applications.

CORU611 is available from stock in two thickness options and is made to the following general specifications:-

Polymer Type:	NR
Hardness:	65°
Density - SG:	1.3
Tensile Strength:	6.0 MPa
Elongation at break:	350%
Abrasion Resistance:	150 mm ³
Temperature Resistance:	-20/+70°C

Style 715 'Stabelites' Linkable EVA Stable Mats

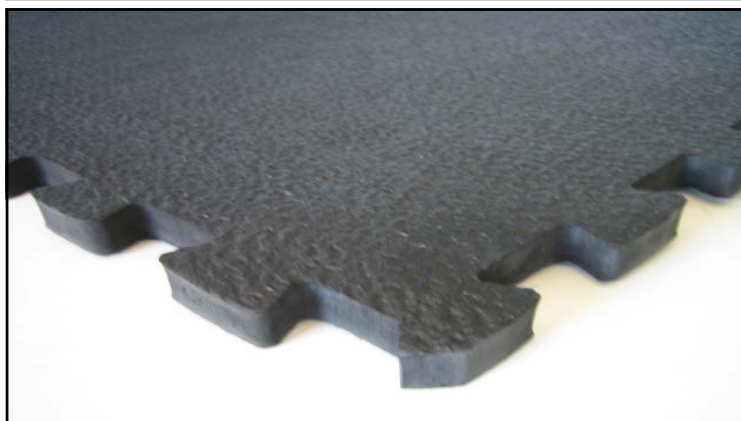

FEATURES:

- 0.91m x 1.22m x 22mm thick
- High quality & durable EVA Foam Floor Mat
- Lightweight and easy to lay and fit to size
- Interlocking connectable edges
- Attractive low relief finish
- Extremely good insulation properties
- Easy to clean surface

Style Information and Data

A high quality dense and durable expanded EVA foam floor or wall mat giving ultimate cushioned protection for horse and livestock.

Ideal for horse and animal stable and transporter vehicle floors and walls.

An ideal mat for self laying and fitting, the size being compatible with most standard stable sizes.

CORU715 is available from stock in black at the list size. It can also be made in Hunter Green or Terra Cotta Red and with bevelled edges as optional to special order. These would be subject to minimum batch run quantities.

Style 577 'Diamond Titanmat' Rubber Matting in rolls



FEATURES:

- 1.2m x 10m x 12.0mm Black
- Heavy Duty Rubber Matting
- Deep channels for better fluid drainage
- Hard wearing and durable compound
- Slip resistant multi-directional pattern
- Impression Finish reverse for non creep
- Very good insulation properties

Style Information and Data

A Durable, very heavy duty, hard wearing rubber matting. Used extensively on vehicle floors, animal transporters, animal enclosures and many varied industrial areas.

CORU577 is available in one size only which are made to the following general specifications:-

Polymer Type:	SBR/NR
Hardness:	66/75°
Density - SG:	1.5
Tensile Strength:	3.5 Mpa
Elongation at break:	300%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Style 665 'Hammered Magnamat' Rubber Matting in rolls



FEATURES:

- 1.8m x 10m x 6mm Black
- 1.2m x 10m x 10mm Black
- 1.8m x 10m x 10mm Black
- 2.0m x 11m x 10mm Black
- 1.8m x 10m x 12mm Black
- 2.0m x 11m x 15mm Black

Thicknesses up to 25mm available to Special order.

- Heavy Duty Rubber Matting
- Wide widths for fewer piece fitting
- Hard wearing and durable compound


Style Information and Data

A smart, attractive and very heavy duty, hard wearing and durable rubber matting. Used extensively on vehicle floors, animal transporters, animal enclosures and many varied industrial areas.

CORU665 in varying thickness and roll sizes which are made to the following general specifications:-

Polymer Type:	SBR/NR
Hardness:	66/75°
Density - SG:	1.5
Tensile Strength:	3.5 Mpa
Elongation at break:	300%
Temperature Resistance:	-20/+70°C

Style 540 Broad Ribbed Runner Matting in rolls

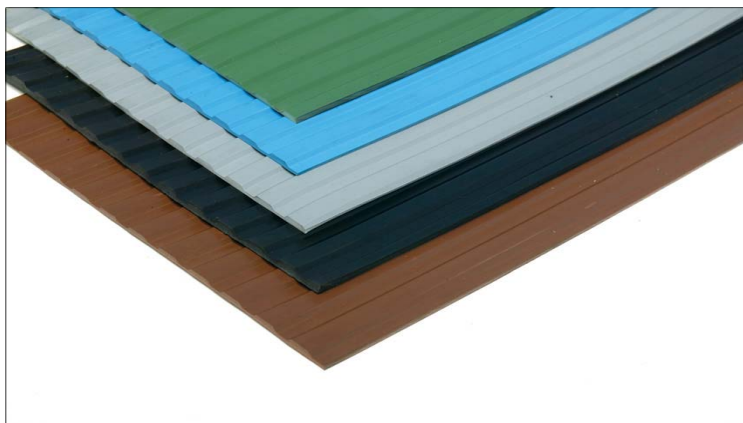

FEATURES:

- Smart, attractive pattern
- Heavy Duty, Hard - wearing & durable rubber
- Clean, sheen finish
- Slip resistant directional ribbed surface
- Impression finish anti-creep reverse
- Good floor to foot cold insulation properties
- Extensive colour range available to special order

Style Information and Data

A heavy duty and durable rubber runner matting. Widely used in the animal, equine and livestock industries offering a tough and hardwearing floor covering and protection layer for enclosures, pens and transporters.

CORU540 is available from stock in a variety of differing formats listed and is made to the following general specifications:-

Polymer Type:	SBR/NR
Hardness:	66/75°
Density - SG:	1.5
Tensile Strength:	3.0 MPa
Elongation at break:	150%
Abrasion Resistance:	250 mm ³
Temperature Resistance:	-20/+70°C

Style 548 'Griptop' Horse & Transporter Ramp Matting in rolls



FEATURES:

- High quality, heavy duty durable synthetic rubber
- Extremely high grip non slip surface
- High strength EP fabric reinforcement / backing
- Available in long length rolls or cut lengths
- Custom cutting service available
- The ultimate in Ramp coverings

Style Information and Data


The ultimate high quality, tough, durable and lightweight rubber horse box and transporter ramp mat. Tough, roughened rope effect rubber surface for excellent non-slip qualities and reinforced with 1 or 2 ply [orange] heavy duty EP fabric - one layer on reverse of material.

CORU548 is stocked in two grades and various roll sizes as listed which are made to the following general [rubber] specifications:-

Polymer Type:	SBR/NR
Hardness:	66/75°
Density - SG:	1.5
Tensile Strength:	8.0MPa
Elongation at break:	300%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

- 1.2m x 50m x 6mm Black 1 ply
- 1.2m x 50m x 6mm Black 2 ply
- 1.2m x 100m x 6mm Black 1 ply
- 1.2m x 100m x 6mm Black 2 ply
- 1.5m x 50m x 6mm Black 1 ply
- 1.5m x 50m x 6mm Black 2 ply
- 1.5m x 100m x 6mm Black 1 ply
- 1.5m x 100m x 6mm Black 2 ply
- All items with HD orange fabric back

Style 675 'Raised Ridge' Moulded Rubber Ramp Mats

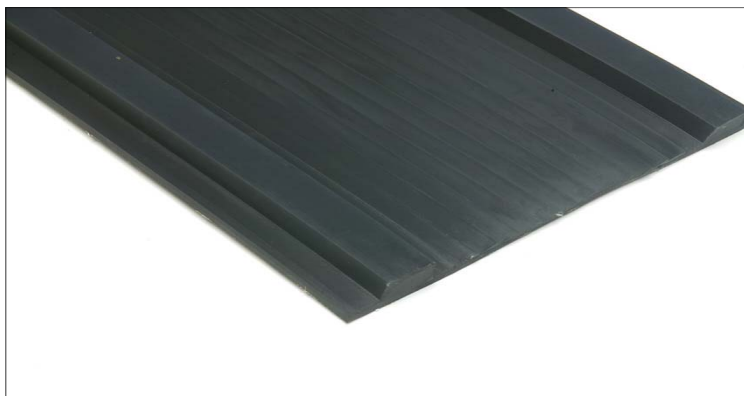

FEATURES:

- 2.4m x 1.2m x 8/27mm Black
- Heavy Duty Moulded Rubber Ramp Mat
- Unique dual ridge surface pattern
- Hard wearing and durable compound
- Slip resistant directional High/Low fluted pattern
- Easy to clean and maintain

Style Information and Data

A heavy duty all rubber moulded dual ridge horse and animal transporter ramp mat offer a high degree of anti-slip characteristics

CORU675 in stock in one side to fit most standard ramps and made to the following general specifications:-

Polymer Type:	SBR/NR
Hardness:	66/75°
Density - SG:	1.5
Tensile Strength:	3.5 MPa
Elongation at break:	300%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Style 711 & 714 Heavy Density EVA Foam [Cushioned] Wall Protection



FEATURES:

- Heavy density foam [cushioned] construction
- Neat plain matt black or patterned finish
- Good impact resistance
- Lightweight for easy handling

Note

Style 711 is available in above sheet format up to 80mm thickness to special order.

Style Information and Data

A high quality dense and durable expanded EVA foam wall protection mats giving ultimate cushioned protection for horse and livestock.

Ideal for horse and animal stable and transporter vehicle walls.

An ideal mat for self fitting, the sizes being compatible with most standard stable/box sizes.

CORU711 is available from stock in black in the listed sizes. It can also be made in various colours, sizes and shape formats to special order. Minimum batch quantities would apply for these.

Style 711 Plain Black

1.0m x 2.0m x 10mm 1.0m x 2.0m x 14mm, 1.0m x 2.0m x 19mm ,1.0m x 2.0m x 25mm ,1.0m x 2.0m x 30mm

Style 714 Patterned Black

1.2m x 1.8m x 10mm , 1.2m x 1.8m x 14mm , 1.2m x 1.8m x 20mm

Style 620 Extra Heavy Duty Cow & Horse & Animal Bed Mats



FEATURES:

- High Quality all rubber mould construction
- Attractive 'Hammered' pattern non slip finish
- Unique recessed, hollowed cellular back
- Excellent foot / floor low temperature insulation
- Heavy Duty 25mm thickness

Style Information and Data

A heavy duty all rubber moulded cow, horse and animal mat with unique construction. Durable and hardwearing suitable for floor areas in stables and enclosures offering excellent animal comfort and protection. **CORU620** is stocked in one size only as listed and is made to the following general specifications:-

Polymer Type:	NR/SBR
Hardness:	65
Density - SG:	1.4
Tensile Strength:	6.0 MPa
Elongation at break:	300%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Style 810 Moulded Crumb Rubber Pavers



FEATURES:

- Heavy duty durable crumb rubber
 - Easy interlocking design for area coverage
 - Slip resistant finish
 - High impact and resilience
 - Excellent protection from falls
 - Attractive 'Paved' look design
 - 0.2m x 0.16m x 25mm Black/Red
 - 0.2m x 0.16m x 43mm Black/Red
- Appx: 36 blocks to make up 1 M2**

Style Information and Data

A conglomerated moulded rubber crumb pavers ideal for horse walker and general areas of movement and activity.

An ideal item for self fitting, the pavers being self locking for ease of lay.

CORU810 is available from stock in black and red in the listed sizes. It can also be made in various colours, sizes and shape formats to special order. Minimum batch quantities would apply for these.

Style 840 Moulded Crumb Rubber Tiles



FEATURES:

- 0.5m x 0.5m x 25mm & 50mm in Black, Red & Green
- Heavy duty durable crumb rubber
- Slip resistant finish
- High impact and resilience
- Excellent protection from falls
- Attractive 'Paved' look design

Style Information and Data

A conglomerated moulded rubber crumb tile ideal for horse walker and areas of movement and activity. Can also be used for general areas of paving offering a warm, safe and comfortable surface. An ideal item for self fitting, the tile being light weight for easy handling for ease of lay.

CORU840 is available from stock in black, red and green in the listed sizes. It can also be made in various colours, sizes and shape formats to special order. Minimum batch quantities would apply for these.

Style 625 Open Ring Type Wash down / Ground Stabilisation Mats



FEATURES:

- High quality, heavy duty durable natural rubber
- Hollow ring type - round type
- Animal Wash down areas
- Muddy Ground stabilisation
- Children's play areas
- Door / Area entrance mats
- Anti-fatigue & workstation Mats
- Connection accessories available.

Style Information and Data

A high quality moulded rubber mat ideal for horse and animal wash down areas where copious amounts of water is prominent. Large holes and recessed studded back facilitates quick drainage of liquids and waste matter.

These mats are also used extensively for muddy field / area stabilisation and children's playground floor coverings.

CORU625 is available from stock in the size formats listed and is made to the following general specifications:-

Polymer Type:	NR/SBR
Hardness:	65°
Density - SG:	1.5
Tensile Strength:	3.0 MPa
Elongation at break:	250%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

AVAILABLE IN

- 0.6m x 0.4m x 16mm & 22mm
- 1.2m x 0.8m x 16mm & 22mm
- 1.5m x 1.0m x 16mm & 22mm
- 1.0m x 1.0m x 30mm Black linkable

Style 695 Moulded Footbath / Well Mats



FEATURES:

- High Quality all rubber mould construction
- Option Black or Black Yellow safety edge
- Bevelled safety edge all round
- Deep 19mm well for disinfectant retention
- Dimpled well base for foot scraping
- Heavy Duty 25mm thickness

Style Information and Data

A heavy duty well mat with excellent liquid retention and durable construction. Ideal for walkway entrances reducing risk of spreading germs and viruses.

CORU695 is stocked in two size and type formats as listed and is made to the following general specifications:-

Polymer Type:	NR/SBR
Hardness:	65
Density - SG:	1.4
Tensile Strength:	6.0 MPa
Elongation at break:	300%
Abrasion Resistance:	200 mm ³
Temperature Resistance:	-20/+70°C

Note

Yellow edged mats are currently under further test and development.

- 700 x 900mm x 25mm Black
- 700 x 1200mm x 25mm Black
- 700 x 900mm x 25mm Black/Yellow
- 700 x 1200mm x 25mm Black Yellow



Head office & Factory:

Units 28 & 30 Purdeys Way
Purdeys Industrial Estate
Rochford
ESSEX UK
SS4 1ND

Telephone: 0845 130 1375
Fax: 0845 130 8375
Email: sales@Coruba.co.uk
Web: www.Coruba.co.uk

Fabrication & Conversion Division:-

Unit 8
Saxon Business Park
Littleport
CAMBRIDGESHIRE UK
CB6 1XX

Telephone: 0044 [0] 1353 864880
Fax: 0044 [0] 1353 864881
Email: cambridge@Coruba.co.uk
Web: www.Coruba.co.uk

Coruba is a division of Accrasystem Limited

UK Registration No: 2127351

UK VAT Number: 506 1111 07